



Data Sheet for Article: LIHGWA20--

EVO LED Square Up 8W 400lm 3000K IP54 anthracite

LED Wall luminaires for outdoor



Light distribution curve






Technical Data

Net length (mm)	91,00
Net width (mm)	65,00
Net height (mm)	145,00
Net weight (kg)	0,71
Luminaire type	wall luminaire
Colour	RAL 7016 (anthracite)
Material	Aluminum PMMA
Beam angle (°)	110
Operating voltage AC (V)	220-240
Temperature range - Operation (°C)	-20 to +40
Lamp holder	LED Platine
Power of system (W)	>0,8
System efficiency (lm/W)	50
Power (W)	8
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	400
Service life	25.000h
Dimmable	no
Protection class	I
IP Rating	IP54
Energy efficiency class	E
Shock strength	IK07
Illuminant incl.	yes
LxWxH mm	91x65x145
Numbers of luminars per MCB B10	15
Numbers of luminars per MCB B13	22
Numbers of luminars per MCB B16	24
Numbers of luminars per MCB C10	22
Numbers of luminars per MCB C16	36

Dimensioned drawing: EVO LED Square Up 8W 400lm 3000K IP54 anthracite

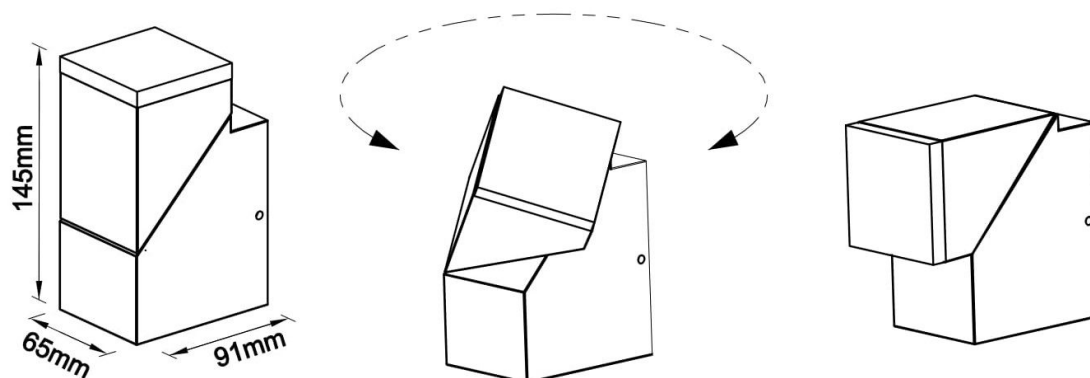

DESCRIPTION	Order No.
EVO LED Square Up 8W 400lm 3000K IP54 anthracite	
LED Wall luminaires for outdoor	LIHGWA20